


PC-XD17

CAMERA SYSTEM SPECIFICATIONS

The PC-XD17 HD Camera was created for a variety of industrial applications. Designed to be utilized as a replacement for the ELMO MN43H and Toshiba IK-M44H devices or easily incorporated into a larger solution as an OEM system without giving up performance. It features a slender anodized black aluminum housing with lens locking ring. The M15.5 lens mount allows for a variety of swappable lenses for a multitude of viewing options. A connectorized unit is available along with a permanently tethered unit for reduced rigid length to cable bend. With the ability to be located up to 60 meters (200 feet) from the control unit, this device is a highly capable solution for remote viewing.

Multiple options are available for the control unit including a portable 5" and 7" Controller Monitor or a rugged anodized black aluminum Desktop Controller with non-slip rubber feet. Both options include built in storage and DVR with full image capture, recording and playback capabilities along with multiple outputs on the Desktop Controller.

Camera Model:	PC-XD17
Image Sensor	1/4.4 Color CMOS
Effective Image Area	3.6mm X 2.03mm
Effective Pixel Array	1284H X 724V
Pixel Size	2.8µm X 2.8µm
Signal/Noise Ratio	>43.1dB
Back Light Compensation	Auto
White Balance	Auto
Min Illumination	.001Lux
Wide Dynamic Range	Auto WDR
Lens Mount	M15.5
Operating Temperature	-40°C~85°C
Cable Length	Up to 60 meters [200']
Dimensions	17mm Dia. X 34mm L

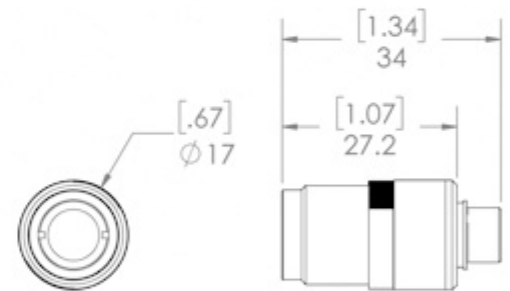

Monitor Controller



Connectorized Unit

Tethered Unit

Desktop Controller

